



Tables based on $\Delta T 60$ - mean water temperature in radiator of 80°C and a room temperature of 20°C - radiator outputs to EN442.
 $\Delta T 50$ - mean water temperature in radiator of 70°C and a room temperature of 20°C .


Model Straight		Width mm (L)	Height mm (H)	Connection Centres mm (I)	Output kw $\Delta t 60$		Output kw $\Delta t 50$	
White	Chrome				White	Chrome	White	Chrome
RIWS-400x 691*	RICS-400x 691*	400	691	350	0.334	0.225	0.261	0.176
RIWS-400x1186*	RICS-400x1186*	400	1186	350	0.547	0.399	0.428	0.312
RIWS-400x1546*	RICS-400x1546*	400	1546	350	0.766	0.536	0.599	0.419
RIWS-450x 691	RICS-450x 691	450	691	400	0.366	0.245	0.286	0.192
RIWS-450x 961	RICS-450x 961	450	961	400	0.492	0.335	0.385	0.262
RIWS-450x1186	RICS-450x1186	450	1186	400	0.602	0.436	0.471	0.341
RIWS-500x 691	RICS-500x 691	500	691	450	0.398	0.266	0.311	0.208
RIWS-500x 961	RICS-500x 961	500	961	450	0.536	0.358	0.419	0.280
RIWS-500x1186	RICS-500x1186	500	1186	450	0.656	0.462	0.513	0.361
RIWS-500x1546	RICS-500x1546	500	1546	450	0.861	0.602	0.673	0.471
RIWS-500x1726	RICS-500x1726	500	1726	450	0.970	0.645	0.758	0.504
RIWS-550x 691*	RICS-550x 691	550	691	500	0.431	0.287	0.337	0.224
RIWS-550x1186*	RICS-550x1186	550	1186	500	0.711	0.509	0.556	0.398
RIWS-550x1546*	RICS-550x1546	550	1546	500	0.934	0.654	0.730	0.511
RIWS-550x1726*	RICS-550x1726	550	1726	500	1.053	0.700	0.823	0.547
RIWS-600x 691*	RICS-600x 691	600	691	550	0.463	0.307	0.362	0.240
RIWS-600x 961	RICS-600x 961	600	961	550	0.624	0.421	0.488	0.329
RIWS-600x1186	RICS-600x1186	600	1186	550	0.765	0.551	0.598	0.431
RIWS-600x1546	RICS-600x1546	600	1546	550	1.006	0.700	0.786	0.547
RIWS-600x1726	RICS-600x1726	600	1726	550	1.135	0.756	0.887	0.591
RIWS-750x1546	RICS-750x1546	750	1546	700	1.223	0.847	0.956	0.662
RIWS-750x1726	RICS-750x1726	750	1726	700	1.383	0.924	1.081	0.722



Model Curved		Width mm (L)	Height mm (H)	Connection Centres mm (I)	Output kw $\Delta t 60$		Output kw $\Delta t 50$	
White	Chrome				White	Chrome	White	Chrome
RIWC-450x 691*	RICC-450x 691*	450	691	400	0.366	0.245	0.286	0.192
RIWC-450x 961*	RICC-450x 961*	450	961	400	0.492	0.335	0.385	0.262
RIWC-450x1186*	RICC-450x1186*	450	1186	400	0.602	0.436	0.471	0.341
RIWC-500x 691*	RICC-500x 691	500	691	450	0.398	0.266	0.311	0.208
RIWC-500x 961*	RICC-500x 961*	500	961	450	0.536	0.358	0.419	0.280
RIWC-500x1186*	RICC-500x1186	500	1186	450	0.656	0.462	0.513	0.361
RIWC-500x1546*	RICC-500x1546*	500	1546	450	0.861	0.602	0.673	0.471
RIWC-500x1726*	RICC-500x1726*	500	1726	450	0.970	0.645	0.758	0.504
RIWC-550x 691*	-	550	691	500	0.431	-	0.337	-
RIWC-550x961*	-	550	961	500	0.581	-	0.419	-
RIWC-550x1186*	-	550	1186	500	0.711	-	0.556	-
RIWC-550x1546*	-	550	1546	500	0.934	-	0.730	-
RIWC-550x1726*	-	550	1726	500	1.053	-	0.823	-
RIWC-600x 691*	RICC-600x 691	600	691	550	0.463	0.261	0.362	0.240
RIWC-600x 961*	RICC-600x 961	600	961	550	0.624	0.421	0.488	0.329
RIWC-600x1186	RICC-600x1186	600	1186	550	0.765	0.551	0.598	0.431
RIWC-600x1546	RICC-600x1546	600	1546	550	1.006	0.700	0.786	0.547
RIWC-600x1726*	RICC-600x1726	600	1726	550	1.135	0.756	0.887	0.591
RIWC-750x1546	RICC-750x1546	750	1546	700	1.223	0.847	0.956	0.662
RIWC-750x1726	RICC-750x1726	750	1726	700	1.383	0.924	1.081	0.722



NOTE: (*) = Towel rail is supply to order.

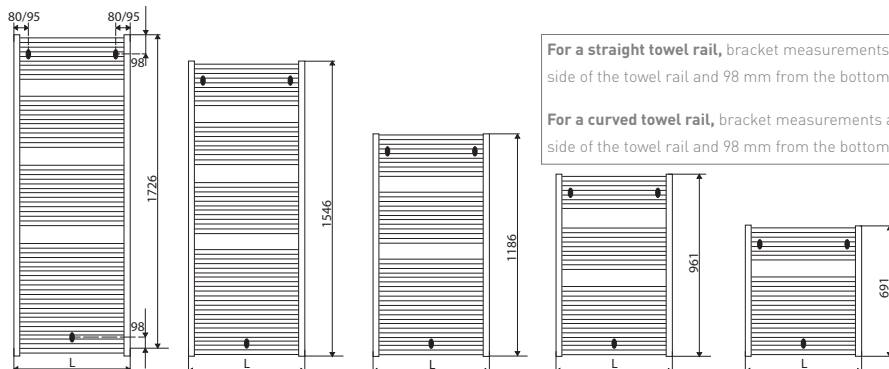

For a straight towel rail, bracket measurements are 80 mm from either side of the towel rail and 98 mm from the bottom of the towel rail.
 For a curved towel rail, bracket measurements are 95 mm from either side of the towel rail and 98 mm from the bottom of the towel rail.

