

Tables based on ΔT 60° C - mean water temperature in radiator of 80°C and room temperature of 20°C.
Radiator outputs to EN442 Standard. - NB: High sizes available for order (not ex stock).


Type 11 Single							
L-mm	H-mm	300	400	500	600	700	900
400	kW	0.286	0.365	0.440	0.513	0.584	0.720
500	kW	0.357	0.456	0.551	0.642	0.730	0.900
600	kW	0.429	0.547	0.661	0.770	0.876	1.080
700	kW	0.500	0.638	0.771	0.898	1.022	1.260
800	kW	0.572	0.730	0.881	1.027	1.168	1.440
900	kW	0.643	0.821	0.991	1.155	1.314	1.620
1000	kW	0.715	0.912	1.101	1.283	1.460	1.800
1100	kW	0.786	1.003	1.211	1.412	1.606	1.980
1200	kW	0.857	1.094	1.321	1.540	1.752	2.160
1400	kW	1.000	1.277	1.541	1.798	2.044	2.520
1600	kW	1.143	1.459	1.762	2.053	2.336	2.880
1800	kW	1.286	1.642	1.982	2.310	2.628	3.240
2000	kW	1.429	1.824	2.202	2.566	2.920	3.600
2300	kW	1.644	2.098	2.532	2.951	3.358	4.139
2600	kW	1.858	2.371	2.863	3.336	3.796	4.679
3000	kW	2.144	2.736	3.303	3.850	4.380	5.397

Type 21 Compact							
L-mm	H-mm	300	400	500	600	700	900
400	kW	0.419	0.525	0.629	0.731	0.832	1.035
500	kW	0.523	0.657	0.786	0.918	1.040	1.294
600	kW	0.628	0.788	0.913	1.096	1.248	1.553
700	kW	0.733	0.919	1.100	1.278	1.456	1.812
800	kW	0.837	1.050	1.257	1.461	1.664	2.071
900	kW	0.942	1.182	1.415	1.644	1.872	2.330
1000	kW	1.046	1.313	1.572	1.828	2.080	2.589
1100	kW	1.151	1.444	1.729	2.009	2.288	2.847
1200	kW	1.256	1.576	1.886	2.192	2.496	3.106
1400	kW	1.465	1.838	2.200	2.557	2.912	3.624
1600	kW	1.674	2.101	2.515	2.922	3.328	4.142
1800	kW	1.884	2.364	2.829	3.287	3.744	4.659
2000	kW	2.093	2.626	3.144	3.653	4.160	5.177
2300	kW	2.407	3.020	3.615	4.200	4.784	5.954
2600	kW	2.721	3.414	4.087	4.748	5.408	6.730
3000	kW	3.139	3.939	4.715	5.479	6.240	7.766

Type 22 Double							
L-mm	H-mm	300	400	500	600	700	900
400	kW	0.505	0.646	0.778	0.901	1.016	1.226
500	kW	0.631	0.807	0.972	1.128	1.271	1.533
600	kW	0.757	0.969	1.166	1.351	1.525	1.839
700	kW	0.883	1.130	1.361	1.576	1.779	2.146
800	kW	1.009	1.292	1.555	1.802	2.033	2.453
900	kW	1.136	1.453	1.750	2.027	2.287	2.759
1000	kW	1.262	1.615	1.944	2.252	2.541	3.066
1100	kW	1.388	1.776	2.139	2.477	2.795	3.372
1200	kW	1.514	1.938	2.333	2.702	3.049	3.679
1400	kW	1.766	2.261	2.722	3.153	3.558	4.292
1600	kW	2.019	2.584	3.111	3.603	4.066	4.905
1800	kW	2.271	2.906	3.499	4.054	4.574	5.518
2000	kW	2.523	3.229	3.888	4.504	5.082	6.131
2300	kW	2.902	3.714	4.472	5.180	5.845	7.051
2600	kW	3.280	4.198	5.055	5.855	6.607	7.971
3000	kW	3.785	4.844	5.832	6.758	7.623	9.197

Type 33 Triple							
L-mm	H-mm	300	400	500	600	700	900
400	kW	0.712	0.907	1.091	1.264	1.425	1.723
500	kW	0.889	1.134	1.363	1.580	1.782	2.153
600	kW	1.067	1.361	1.636	1.895	2.138	2.584
700	kW	1.245	1.587	1.909	2.211	2.495	3.015
800	kW	1.423	1.814	2.181	2.527	2.851	3.445
900	kW	1.601	2.041	2.454	2.843	3.207	3.876
1000	kW	1.779	2.268	2.727	3.159	3.564	4.307
1100	kW	1.957	2.495	2.999	3.475	3.920	4.738
1200	kW	2.135	2.721	3.272	3.791	4.276	5.168
1400	kW	2.491	3.175	3.817	4.423	4.989	6.030
1600	kW	2.846	3.628	4.363	5.055	5.702	6.891
1800	kW	3.202	4.082	4.908	5.686	6.415	7.752
2000	kW	3.558	4.536	5.453	6.318	7.127	8.614
2300	kW	4.092	5.216	6.271	7.266	8.197	9.906
2600	kW	4.625	5.896	7.089	8.214	9.266	11.198
3000	kW	5.337	6.803	8.180	9.477	10.691	12.921

Standard bracket supplied with De Longhi radiators

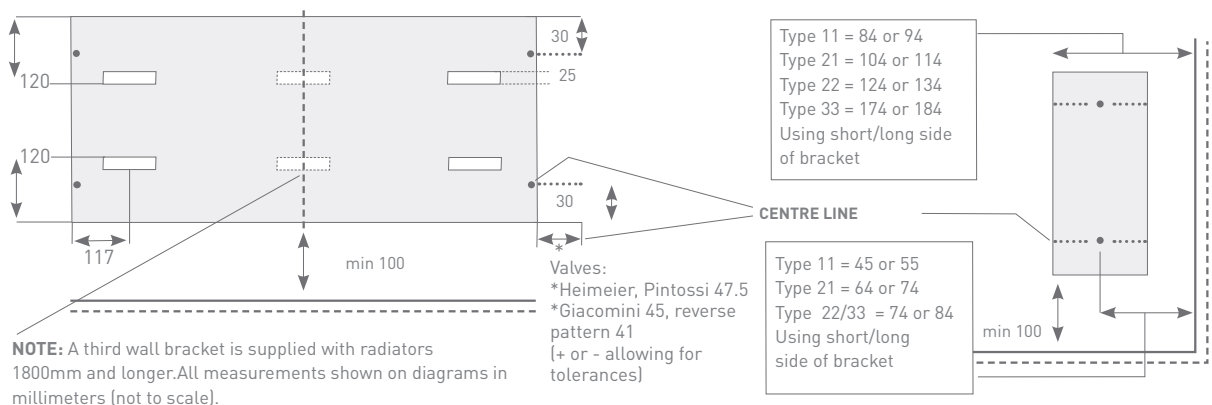

Instructions for placement of noggins for De Longhi linear vertical radiators.

Suggested size for noggins; 90mm x 40mm framing timber installed vertically to either side of the radiator and set in 116mm from side of radiator. This will ensure you have suitable fixing for brackets.

NOTE: All measurements shown on diagrams in millimeters (not to scale).